

CONTACT US TODAY ON 0870 423 8584 FOR MORE INFORMATION



### ■ Endura Fence

- 2 metre high, anti-climb fence
- Used as a direct plastic replacement for metal mesh fencing
- Lightweight making it easy to transport and erect
- Ideal for outdoor events
- Designed to protect deep excavations (over 1 metre) and hazardous sites
- Integral reflective panel and complies with Chapter 8 Streetworks
- Links directly with existing steel mesh fencing, using the same bases and clamps
- Easy one-man assembly
- Compact design for transport by smaller vehicles
- Corporate colours and nameplating service available
- 1 metre wide 'gateway' sections also available

Length: 2000mm  
Height with feet: 2000mm  
Weight: 12kg

## CONTACTS NATIONWIDE

### SCOTLAND

#### Wishaw, Lanarkshire

6-10 Janesmith Street Etna Industrial Estate  
Wishaw Lanarkshire ML2 7XJ  
T +44 (0)1698 358 877 F +44 (0)1698 351 770

#### Glasgow

Lloyd Street Farme Cross Rutherglen  
Glasgow G73 1NP  
T +44 (0)141 647 7997 F +44 (0)141 647 8984

#### Edinburgh

14 Grange Road Houston Industrial Estate  
Livingston EH54 5DE  
T +44 (0)1506 431 335 F +44 (0)1506 432 422

### WALES

#### Cardiff

Unit 1 Quay Point Collivaud Place  
Off Ocean Way Cardiff CF24 5HF  
T +44 (0)2920 464 856 F +44 (0)2920 493 089

### NORTHERN ENGLAND

#### Widnes, Cheshire

Pitt Street West Bank Widnes Cheshire WA8 0TG  
T +44 (0)151 420 3331 F +44 (0)151 495 2298

#### Gateshead

Stoneygate Lane Abbotsford Road  
Felling Gateshead NE10 0EX  
T +44 (0)191 469 7504 F +44 (0)191 469 8237

### MIDLANDS

#### Birmingham, West Midlands

87-93 Amington Road Birmingham  
West Midlands B25 8ET  
T +44 (0)121 706 0000 F +44 (0)121 706 9832

#### Bury St Edmunds, East Anglia

Thingoe Hill Bury St Edmunds Suffolk IP32 6BE  
T +44 (0)1284 724 824 F +44 (0)1284 765 824

### SOUTHERN ENGLAND

#### Grays, Essex

Groundworks Division Europa Business Park  
Magnet Road Grays Essex RM20 4DB  
T +44 (0)1375 383 812 F +44 (0)1375 386 844

#### West Thurrock, Essex

Watson Close Oliver Road West Thurrock  
Essex RM20 3EF  
T +44 (0)1708 861 821 F +44 (0)1708 869 537

#### Guildford, Surrey

Birtley Road Bramley Nr Guildford Surrey GU5 0LA  
T +44 (0)1483 898 777 F +44 (0)1483 894 777

#### Romsey, Hampshire

Bunny Lane Sherfield English Nr Romsey  
Hampshire SO51 6FT  
T +44 (0)1794 884 876 F +44 (0)1794 884 277




# ROAD PRODUCTS

## PRODUCT GUIDE



- SIG Trak
- TuffTrak
- 15/5 Road Plate
- Strong Fence
- Strong Wall
- Wall Barrier
- Avalon Barrier
- Endura Fence

CONTACT US TODAY ON 0870 423 8584 FOR MORE INFORMATION

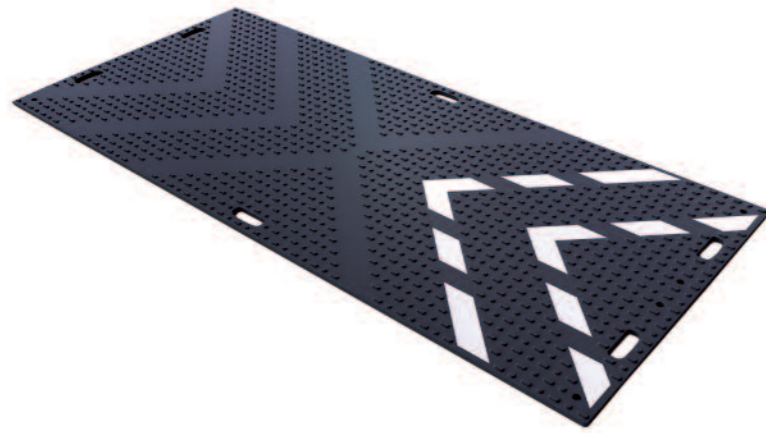

### SIG Trak

- Easy to install ground protection for pedestrian and vehicles
- Fast temporary access, working areas and trackways
- Unique chevron design grip surface
- Unique non-slip reflective markings for night safety (optional)
- Unique 'Cats' Eyes' reflectors for night safety (optional)
- Save time and money in reinstating ground

Thickness: 14mm  
Width: 1200mm  
Length: 2400mm  
Weight: 35kg  
Weight tested: Up to 60 tonnes

### TuffTrak

- TuffTrak is a large heavy-duty roadmat that provides temporary road for plant and vehicles up to 140 tonnes
- Effective, fast and simple connection
- Highly efficient on soft ground
- Low theft risk
- Lower transport costs
- Avoids severe rutting and eco damage to ground

Length and Width of each mat: 3000mm x 2500mm  
Thickness: 40mm  
Weight: 290kg  
Material: High Density Polyethylene  
Traction: Crisscross surface 6mm x 2mm with 100mm interval  
Connectivity: Steel corner connectors available  
Weight tested: Up to 140 tonnes

### 15/5 Road Plate

- Distinctive yellow colouring and retro reflective triangular panels built into the surface give maximum visibility for pedestrian safety
- Ramp design helps slow down traffic for increased safety
- Inbuilt anti-skid surface undamaged by stacking
- Single wheel load: 6000kg at 700mm trench width
- Personalisation service available upon request

Length, end-to-end: 1500mm  
Width: 500mm  
Weight: 35kg  
Material: Glass reinforced polyester  
Connectivity: Inbuilt heavy-duty steel linking brackets  
Weight tested: Up to 44 tonnes

### Strong Fence

- Heavy-duty, high level anti-climb fence for deep excavations and hazardous sites
- Very stable, ideal for high wind situations (ask for wind data)
- Compliant with Chapter 8 Streetworks
- One-man assembly
- Compact for transport by small vehicle
- Corporate colours and nameplating service available
- Entrance gateways can be incorporated
- Tamper-proof locking clamps available

Length: 1000mm  
Height: 2000mm

Load performance depends on ground conditions as well as the weight and types of vehicles and plant. Zigma ground solutions Ltd, its agents or employees are not held liable for any damage to existing ground or property through the use of Euromats.

CONTACT US TODAY ON 0870 423 8584 FOR MORE INFORMATION

### Strong Wall

- Acts as a visual barrier to protect pedestrians from moving vehicles and deep excavations
- Can withstand a sideways force up to 45kg
- Easy to assemble: Each section slots into the base reinforcing the wall as it builds thus creating a rigid Strong Wall
- HD moulded top section can be filled with water adding a further 15kg

Height: 1000mm  
Length: 1080mm  
Width: 520mm  
Weight: 24kg



### Wall Barrier

- The Wall Barrier is a substantial barrier that is easy to set up and link together
- The barrier can be filled with water or sand for extra stability
- Efficient stacking reduces transport costs
- Supplied in red or white but other colours are available on request
- The Wall Barrier can be used at docks, airports and construction sites to ensure pedestrian guidance and safety

Length, end to end: 1000 mm  
Height: 605 mm  
Width: 510 mm  
Material: UV stabilised polythene



### Avalon Barrier

- Linking system design creates secure joints even on uneven ground – over kerbs, up slopes, across rough terrain
- Unlocked or locked mode configurations prevent unauthorised dismantling
- Complies with BS 7818 Specification for pedestrian restraint systems making it ideal for event management and pedestrian control usage
- Can be used with link boards to extend barrier configurations

Length: 2000mm  
Weight: 10kg  
Height with feet: 1000mm  
Material: High density polythene

